

FUSION **PLANKS**



formed as one to create a unified flow

innovation & inspiration

| *Signature*[®]
floorconcepts



CORE




CORE
ZINC
6-000-000PL

CORE
LEAD
2-000-000PL

CORE
CARBON
1-000-000PL

CONNECT

Width of colour stripe varies across planks.

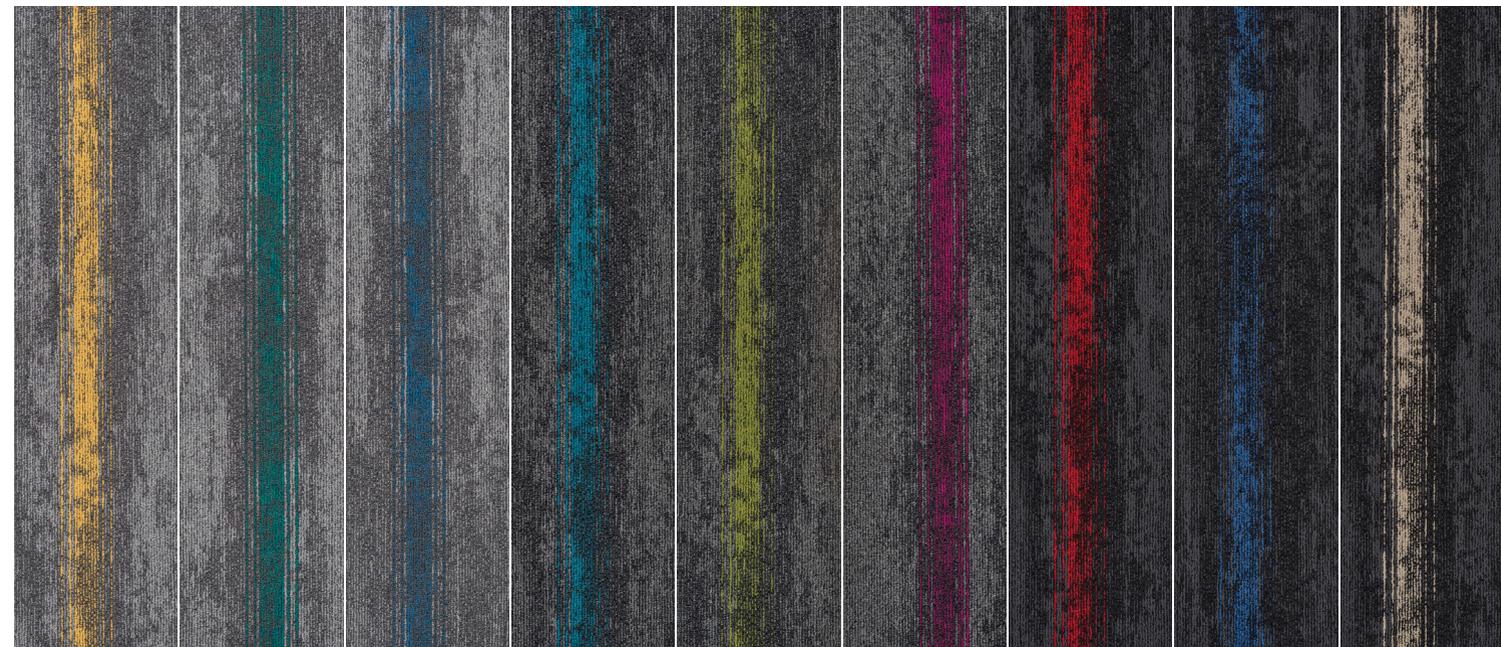

CONNECT
ZINC YELLOW
6-082-003PL

CONNECT
ZINC TEAL
6-046-021PL

CONNECT
ZINC AZURE
6-040-036PL

CONNECT
LEAD AQUA
2-021-031PL

CONNECT
LEAD GREEN
2-048-002PL


CONNECT
LEAD MAGENTA
2-060-062PL

CONNECT
CARBON RED
1-023-035PL

CONNECT
CARBON NAVY
1-019-040PL

CONNECT
CARBON SAND
1-007-099PL

COMPOUND

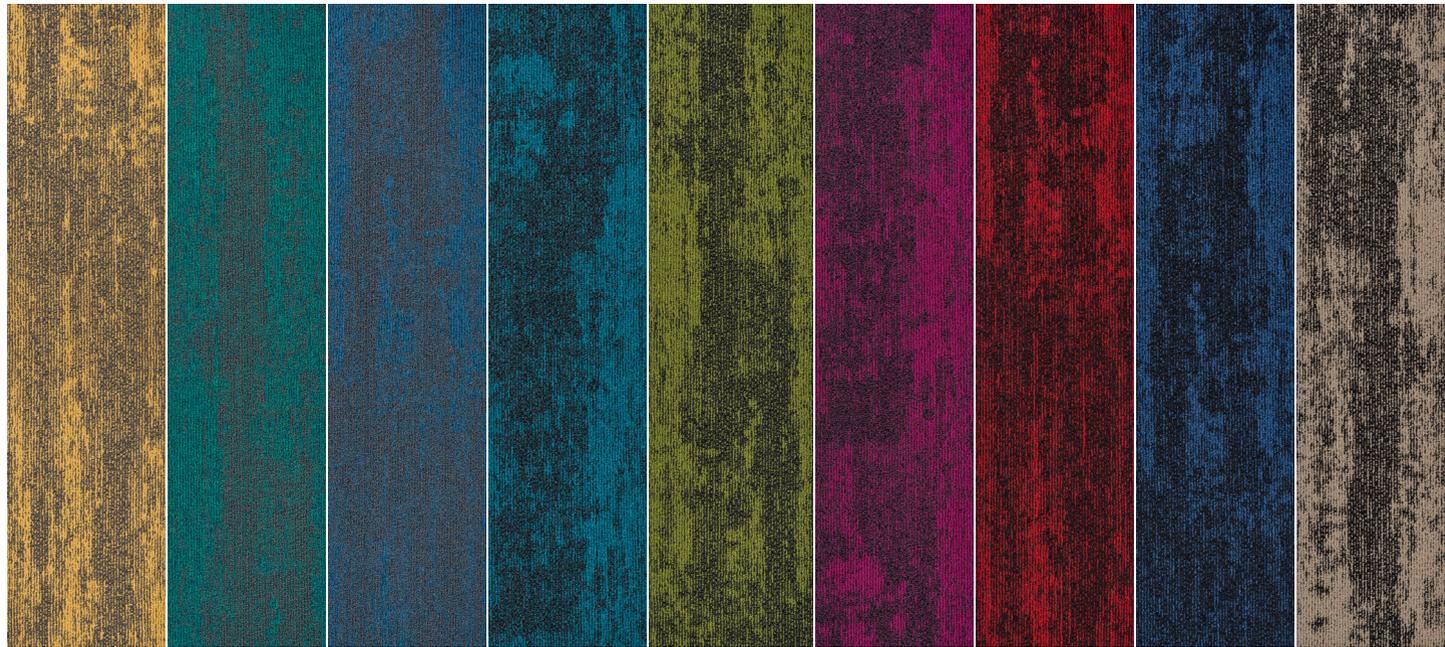

COMPOUND ZINC YELLOW 6-082-003PL	COMPOUND ZINC TEAL 6-046-021PL	COMPOUND ZINC AZURE 6-040-036PL	COMPOUND LEAD AQUA 2-021-031PL	COMPOUND LEAD GREEN 2-048-002PL	COMPOUND LEAD MAGENTA 2-060-062PL	COMPOUND CARBON RED 1-023-035PL	COMPOUND CARBON NAVY 1-019-040PL	COMPOUND CARBON SAND 1-007-099PL
-----------------------------------------------	---------------------------------------------	----------------------------------------------	---------------------------------------------	----------------------------------------------	------------------------------------------------	----------------------------------------------	-----------------------------------------------	-----------------------------------------------

	core	connect	compound
construction	multi-level loop	multi-level loop	multi-level loop
yarn/fibre	solution dyed nylon	solution dyed nylon	solution dyed nylon
pile weight	580g/m ²	612g/m ²	646g/m ²
pile height	4mm	4mm	4mm
gauge	1/12	1/12	1/12
tile size	250mm x 1000mm	250mm x 1000mm	250mm x 1000mm
total thickness	6.5mm	6.5mm	6.5mm
carton size	5m ²	5m ²	5m ²
total weight	4.58 kg/m ²	4.61 kg/m ²	4.65kg/m ²
dimensional stability	<0.15%	<0.15%	<0.15%
backing	Thermo Bak™	Thermo Bak™	Thermo Bak™
electrostatic propensity	<2.0kv	<2.0kv	<2.0kv
fire rating ISO 9239 1	>4.5 kw/m ² critical radiant flux	>4.5 kw/m ² critical radiant flux	>4.5 kw/m ² critical radiant flux
recommended adhesive	RLA Polymers GS300	RLA Polymers GS300	RLA Polymers GS300
installation method	ashlar, herringbone, basket weave	ashlar, herringbone, basket weave	ashlar, herringbone, basket weave
availability	in stock	in stock	in stock
Comfi Bak® option	50m ² minimum	50m ² minimum	50m ² minimum
customise Shapes™	50m ² minimum	50m ² minimum	50m ² minimum
traffic	extra heavy duty commercial	extra heavy duty commercial	extra heavy duty commercial
warranty	15 year limited	15 year limited	15 year limited
fire	suitable all areas	suitable all areas	suitable all areas
stain/soil	Ultra Gard (thermo chemical treatment)	Ultra Gard (thermo chemical treatment)	Ultra Gard (thermo chemical treatment)
sustainability	GreenTag® Green Rate Level A EPDs and Declare labels WELL eligible	GreenTag® Green Rate Level A EPDs and Declare labels WELL eligible	GreenTag® Green Rate Level A EPDs and Declare labels WELL eligible



*Our manufacturing process ensures no two planks are the same. Please note that there may be batch variations from different dye lots.



Signature
floorconcepts

au 03 9401 0888
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz

Terms & Conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification. 01/2020 ©