


STRIKE STRIKEOUT

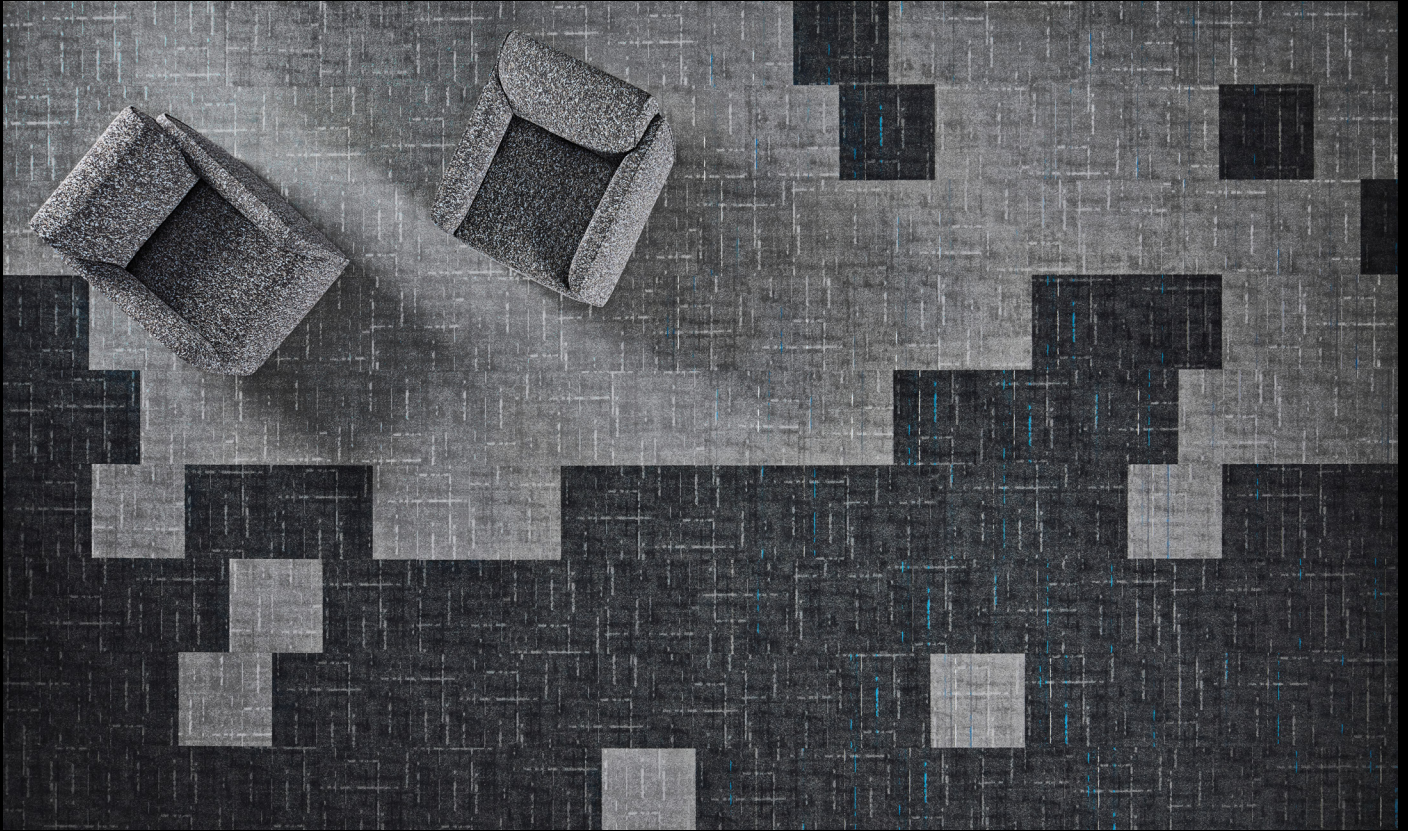


One collection. Two perspectives.

STRIKEOUT STRIKE


innovation & inspiration

Signature[®]
floorconcepts


STRIKE STRIKEOUT




STRIKE II NICKEL PHOSPHORUS
2-600-189CB




STRIKE II NICKEL SELENIUM
2-600-169CB




STRIKE II NICKEL KRYPTON
2-600-045CB




STRIKEOUT II NICKEL
2-600CB




STRIKEOUT II SODIUM
2-700CB




STRIKEOUT II TUNGSTEN
2-800CB




STRIKE II NICKEL HELIUM
2-600-132CB




STRIKE II NICKEL CHROMIUM
2-600-071CB




STRIKE II NICKEL XENON
2-600-103CB




STRIKEOUT II CLAY
2-200CB




STRIKE II GRAPHITE OXYGEN
2-300-019CB




STRIKE II GRAPHITE NITROGEN
2-300-021CB




STRIKE II GRAPHITE SULPHUR
2-300-124CB




STRIKEOUT II GRAPHITE
2-300CB




STRIKEOUT II GALLIUM
2-100CB




STRIKEOUT II RHODIUM
2-500CB




STRIKE II GRAPHITE ARGON
2-300-107CB




STRIKE II GRAPHITE HYDROGEN
2-300-137CB



STRIKE II GRAPHITE IODINE
2-300-054CB



STRIKEOUT II CHARCOAL
2-400CB



STRIKEOUT II SILICA
2-900CB

Our manufacturing process ensures no two tiles are the same.
Please note that there may be batch variations from different dye lots.

STRIKE STRIKEOUT

Construction	Textured Loop & Tip Shear
Yarn/Fibre	Solution Dyed Nylon
Pile Weight	612g/m ² (18oz)
Pile Height	4mm
Gauge	1/12
Tile Size	500mm x 500mm
Total Thickness	10mm
Carton Size	5m ²
Total Weight	4.4kg/m ²
Dimensional Stability	<0.15%
Backing	Comfi Bak®
Electrostatic Propensity	<3.0kv
Fire Rating ISO 9239.1	>5.2 kw/m ² Critical Radiant Flux
Recommended Adhesive	RLA Polymers GS300
Installation Method	Quarter Turn, Ashlar, Directional, Brick
Availability	In Stock
Thermo Bak™ Option	50m ² Minimum
Shapes Option	50m ² Minimum
Vivid 202 Custom	50m ² Minimum
ACCS Rating	Commercial Extra Heavy Duty
Warranty	15 Years
Fire	Suitable All Areas
Stain/Soil	Ultra Gard
Sustainability	GreenTag® GreenRate Level A EPDs and Declare Labels WELL & LBC Eligible



WITH THANKS TO OUR FURNITURE SUPPLIER **ZENITH**



Declare.



au 1800 150 554
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz



Terms & conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Product may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Technical Information Manual, Maintenance Guide & Warranty Guide for further clarification. © Signature Floors 05/2023