






## aboute classic



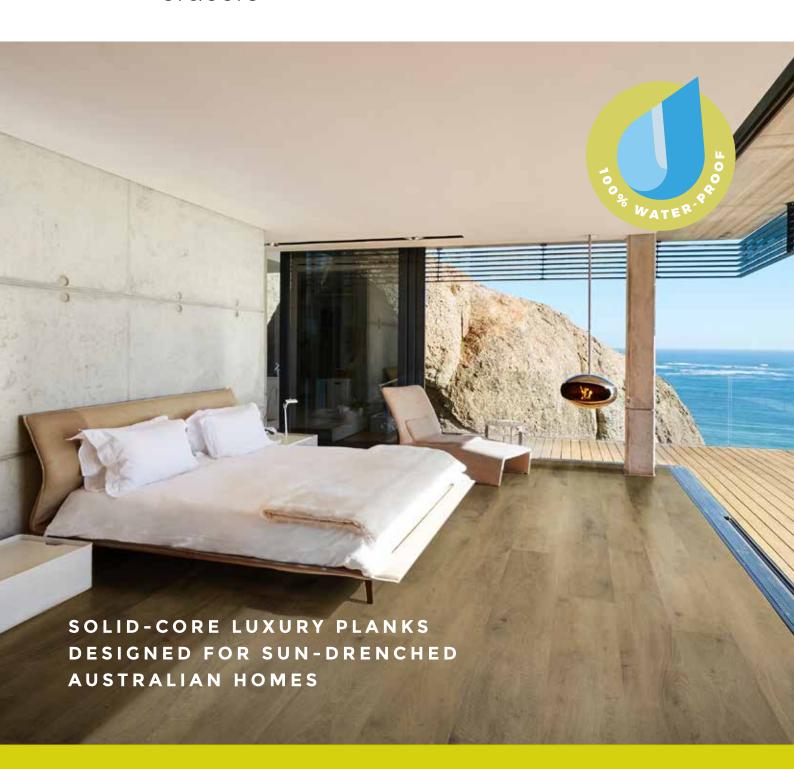





NSW Blackbutt ABODERG1644



QLD Spotted Gum
ABODERG1640



NSW Spotted Gum
ABODERG1641



Tablelands Spotted Gum **ABODERG1642** 



QLD Blackbutt ABODERG1643



## **TECHNICAL SPECIFICATIONS**

Plank Size 176 x 1813mm
Total Thickness 5.50mm
Wear Layer 0.55mm

Wear Layer Treatment Quartz enhanced PUR coating

Surface Natural embossed, true to life oak boards

Micro V groove 4 sided

12.1 kW/m<sup>2</sup> critical radiant flux

R9 / P2

Suitable for water based systems

7 pcs/box (2.23m<sup>2</sup>)

Tight Lock - no underlay - min. floor prep required <sup>a</sup>

Lifetime Residential, 15 Yr Commercial



Abode has been tested and certified to comply with strict indoor quality emission requirements.



Edge Design

Slip Rating

Warranty

Fire Rating ISO 9239.1

Underfloor Heating

Installation Method

Planks per Box



















- installs directly over irregularities and existing floors
- can be laid over ceramic and porcelain tiles
- can be laid over concrete
- can be laid over chipboard and tongue & groove flooring
- existing floors need to adhere to the sub-floor
- existing floor cannot be cushioned
- ullet uneven floors require sub-floor preparation when there is a height variation more than 3mm over 1m  $^\Delta$
- sub-floors should be clean and dry

Please refer to installation guidelines; if uncertain seek clarification prior.



au 03 9401 0888 nz 0800 150 555 signaturefloors.com.au signaturefloors.co.nz

Terms & Conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification.