



sunplank® | summerville




AUSSIE SPECIES
& TRADITIONAL OAKS

SUN-PROOF & WATER-PROOF
LUXURY FLOORS DESIGNED FOR SUN-DRENCHED HOMES

your style, your home

| Signature®
signaturesunplank

SUN PROOF
FADE PROOF
WATER PROOF
WARP PROOF
HEAT PROOF

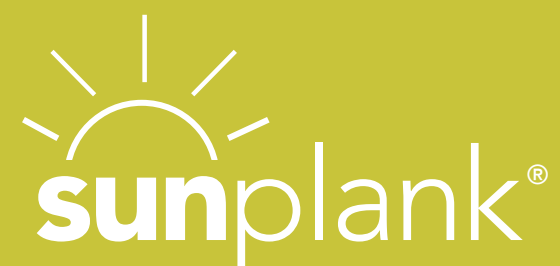

PARK OAK

CAN YOU
IMAGINE A
FLOOR THAT
PERFECTLY
SUITS THE WAY
YOU LIVE?



SUMMERVILLE SUNPLANK® IS DESIGNED FOR EASY FAMILY LIVING.

IT'S 100% WATER-PROOF SO THERE'S NO NEED TO WORRY ABOUT BATH TIME, WET DOGS OR DRIPPING KIDS.

SUMMERVILLE SUNPLANK® IS SUN-PROOF SO IT WON'T FADE OR WARP IN THE HOTTEST OF AUSSIE SUMMERS. OPEN THE WINDOWS, PULL BACK THE CURTAINS AND LET THE SUNSHINE FLOOD IN.

SUNPLANK® IS A TRULY STRESS-FREE FLOOR FOR HOW WE LIVE TODAY.



A FLOOR THAT WONT FADE,
WARP OR LIFT IN THE TOUGHEST CONDITIONS



MEROO SPOTTED GUM






BUNYA BLACKBUTT



WHAT MAKES RETREAT SUNPLANK® SO SPECIAL?

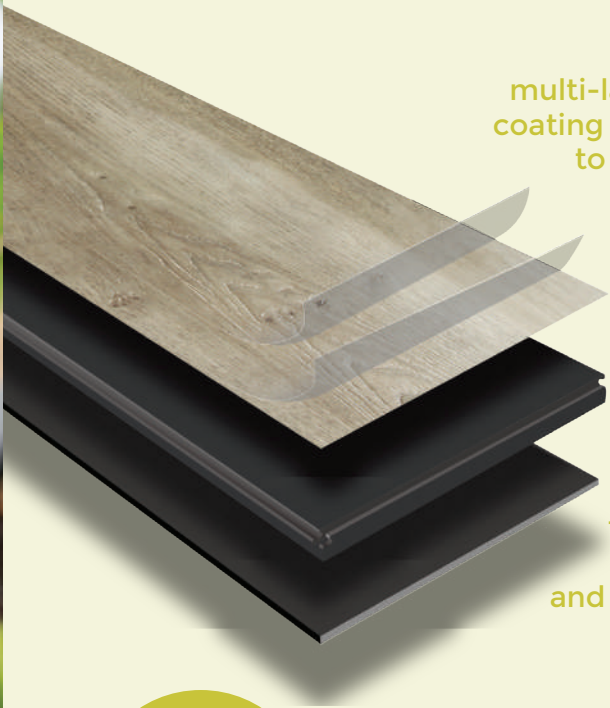

EXTRA HEAVY DUTY
multi-layer quartz enhanced PUR
coating has exceptional resistance
to heavy foot traffic, indents,
scratches & scuffs

DEEP STRUCTURED
decorative layer
true-to-life look & feel
of premium timber

RIGID SOLID-CORE
extra dense planks
free from harmful content,
water-proof, extra stable
and extra sound absorbent, up
to 80% natural limestone

BUILT IN UNDERLAY
for added acoustic performance

SECURE INSTALLATION
the TIGHT-LOCK system ensures
planks always remain flat & stable

**50°
CELSIUS
HEAT**

your style, your home



YOUR LIFETIME GUARANTEE



oaks

Featuring the natural grain and texture of oak varieties, the Summerville Oaks create stunning floors that out perform traditional timber time and time again. Exceptionally hard wearing, Summerville is designed to suit your lifestyle.



Kings Oak
SUM4911**SP**

Paronella Oak
SUM4912**SP**


Hyde Oak
SUM4914**SP**

Royal Oak
SUM491**SP**

Fitzroy Oak
SUM4917**SP**

Park Oak
SUM4918**SP**


Accessories: Scotia

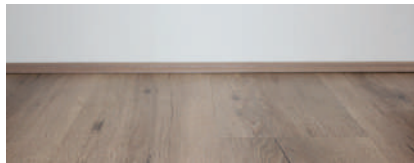

Stair nosing



Junior ends

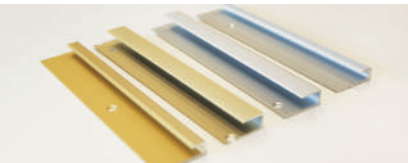

aussie species

From Blonde Tasmanian Oak to Spotted Gums, Aussie Species brings the outdoors in. 'Woodmix' is an attractive feature for your new floor.



**Cradle
Tasmanian Oak**
SUM2060**SP**

**Idalia
Spotted Gum**
SUM1640**SP**

**Meroo
Spotted Gum**
SUM1641**SP**

**Bunya
Blackbutt**
SUM1643**SP**

Plank size:

223 x 1213mm

Thickness:

5.50mm

Wear Layer:

0.55mm



AT LAST! AN ALTERNATIVE TO TILES
BEAUTIFUL WATER-PROOF SUNPLANK® IN THE BATHROOM



PARONELLA OAK



**SUNPLANK® CAN BE
LAID DIRECTLY OVER
MOST SURFACES
MAKING INSTALLATION
VERY FAST & EASY**



CRADLE TASMANIAN MOUNTAIN OAK

your style, your home

Signature
signaturesunplank


SUMMERVILLE SUNPLANK® IS DESIGNED
FOR ANY ROOM IN THE HOUSE.

- KITCHEN, PANTRY, LAUNDRY
- LIVING AREAS, BEDROOMS
- ENSUITE & FAMILY BATHROOMS
- CONSERVATORY & WINE CELLAR

KEY FEATURES	SUMMERVILLE SUNPLANK®	LOOSELAY LVT	TRADITIONAL LAMINATE
Sun-proof (withstands direct sunlight)	✓	✓*	✗
Will not warp or deform >80 degrees	✓	✗	✓
Water-proof (can be installed in bathrooms)	✓	✗	✗
Suitable in rooms with floor to ceiling windows	✓	✗	✗
Suitable for bathrooms & laundries	✓	✗	✗
Resistant to indentation	✓	✓	✓
Sound absorbent - BCA Acoustic Compliant	✓	✗	✗
Built in underlay	✓	✗	✗
Core is free of harmful content & plasticizers	✓	✗	✓
Suitable to be laid over tiles	✓	✗	✓
No acclimatisation necessary	✓	✗	✗
No telegraphing* (show through)	✓	✗	✓
Installs in areas >400m² without transition gaps	✓	✗	✗
Lays directly over chipboard	✓	✗	✗
Fast & easy TIGHT LOCK install ('floating floor')	✓	✗	✓
Can be wet & steam mopped	✓	✗	✗

*inspect your sub-floor before you begin. It must be clean, dry (max. 2.5% moisture content - CM method) and level to 5mm (3/16") within a 3m (10 ft) span. * installed with permanent adhesive

SUNPLANK® PERFORMS BRILLIANTLY UNDER EXTREME HEAT

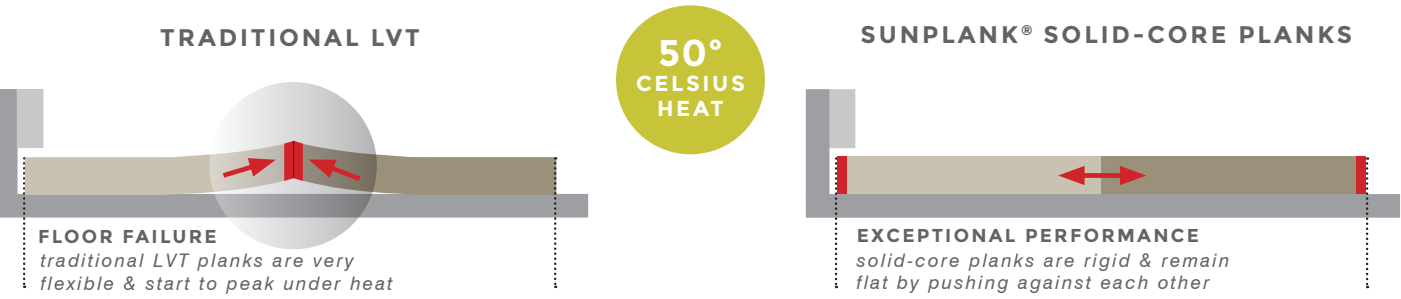

TECHNICAL SPECIFICATIONS

Plank Size	223 x 1213mm
Total Thickness	5.50mm (4mm board & 1.50mm backing)
Wear Layer	0.55mm
Wear Layer Treatment	Quartz enhanced PUR coating
Wear Class	Commercial class 34 - <i>very heavy traffic</i>
Surface	Natural embossed, true to life oak boards
Slip Resistance	P3 * <i>relates to all stock received from October 2018</i>
Edge Design	Micro V groove 4 sided
Fire Rating ISO 9239.1	Pass
Underfloor Heating	Suitable for water based systems
Planks per Box	9 pcs/box (2.43m²)
Installation Method	Tight Lock - no underlay - min. floor prep* required
Warranty	Lifetime Residential, 15 Year Commercial

EASY TO INSTALL

Sunplank® uses the TIGHT LOCK Installation method. No glue is used. Planks CLICK together tightly on the long side and DROP into place on the short side, to give a water tight seal that doesn't warp or lift.

PERFORMANCE

Sunplank® solid-core planks feature a multi-layer quartz enhanced urethane coating which provides exceptional resistance to heavy foot traffic, indents, scratches and scuffs. They provide excellent acoustic benefits making them ideal where noise dampening is needed. In addition, Sunplank® floors are heat and cold proof, water, sun and fade proof, scratch and impact proof. Sunplank® is an exceptional flooring product.

PROTECT YOUR INVESTMENT PLASTICIZER MIGRATION

Whilst this product is resistant to the harshest environments, it is not scratch proof. To ensure you get the best of your floor, place felt stoppers on the bottom of all furniture.

SUB-FLOORS

Sunplank® can be installed over most surfaces such as tiles with grout lines, particleboard and chipboard. Because planks are thick and rigid, there's no 'show through' (telegraphing).* Sunplanks® do not require acclimatisation before laying, making installation, quick, clean and easy.

* uneven floors require floor preparation. Please refer to

SAFE & SUSTAINABLE

The solid-core of Sunplank® is free from ortho-phthalates, plasticizers and other harmful content. The TIGHT LOCK installation method is chemical, glue and dust free. Sunplanks® are a certified product: (Reach - CE - PROP 65 - Floorscore - VIC A+ - DIBT)



•can be laid over tiled floors •sub-floor should be clean & dry •installs directly over irregularities •can be laid over chipboard - provided sub-floor is prepared in accordance with AS 1884 2012 •uneven floors require sub-floor preparation. Please refer to our installation instructions



au 03 9401 0888
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz

FRONT PAGE: CRADLE TASMANIA MOUNTAIN OAK

Terms & Conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification.

This warranty is in addition to and does not affect your statutory rights. Our goods come with guarantees that cannot be excluded under the Australian Consumer/NZ Consumer Guarantees Act 1993. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Please refer to our warranties on: www.signaturefloors.com.au www.signaturefloors.co.nz 10/2018©