



Retreat

HYBRID FLOORING



TOOLARA SPOTTED GUM

Technical specifications

Plank size	228 x 1830mm
Total thickness	7.00mm (5.50mm board & 1.50mm backing)
Wear layer	0.50mm
Wear layer treatment	Quartz enhanced PUR coating
Surface	Natural embossed, true to life timbers
Backing	Liteback® enhanced acoustic backing
Slip resistance	P4
Edge design	Micro V groove 4 sided
Fire rating ISO 9239.1	10.3kW/m ²
Underfloor heating	Suitable for water based systems
Planks per box	4 pcs/box (1.67m ²)
Installation method	5G - no underlay - min. floor prep* required
Warranty	Lifetime Residential, 15 Year Commercial



Nambung Oak
RET001



Dorrigo Oak
RET002




Tarill Oak
RET003



Avar Oak
RET004




Blonde Tasmanian Oak
RET005

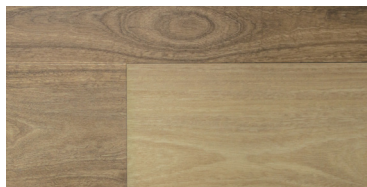

Toolara Spotted Gum
RET006 *WOODMIX



Mirima Spotted Gum
RET007

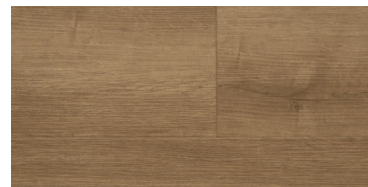

Malin Oak
RET008



Inger Oak
RET009



Yengo Spotted Gum
RET010 *WOODMIX



waterproof*



scratch resistant



wet mop



easy clean



stain resistant



hardwearing



fire resistant



silica free

