

Signature[®]
signaturefloors

Summerville
Hybrid Flooring



AUSSIE SPECIES
& TRADITIONAL OAKS

**WATER-PROOF LUXURY FLOORS
DESIGNED FOR AUSTRALIAN &
NEW ZEALAND HOMES**

WATER PROOF
FAMILY PROOF
FADE RESISTANT
HEAT RESISTANT

Signature[®]
signaturefloors

Summerville
Hybrid Flooring



ROYAL OAK



CAN YOU
IMAGINE A
FLOOR THAT
PERFECTLY
SUITS THE WAY
YOU LIVE?



**SUMMERVILLE IS DESIGNED
FOR EASY FAMILY LIVING.**

IT'S 100% WATER-PROOF SO THERE'S
NO NEED TO WORRY ABOUT BATH TIME,
WET DOGS OR DRIPPING KIDS.

SUMMERVILLE IS FADE-RESISTANT FOR
THE HOTTEST OF SUMMERS.

SUMMERVILLE IS A TRULY STRESS-FREE
FLOOR FOR HOW WE LIVE TODAY.



GOOD LOOKS & GREAT PERFORMANCE
IN THE HARDEST WORKING ROOM IN THE HOME



MEROO SPOTTED GUM



THERE'S NO NEED TO PANIC WHEN THE
GREAT OUTDOORS COME INSIDE.
WET TOGS IN SUMMER ARE NO MATCH
FOR SUMMERVILLE.

THE PERFECT FAMILY FLOOR



Summerville

Hybrid Flooring

oaks

Featuring the natural grain and texture of oak varieties, the Summerville Oaks create stunning floors that outperform traditional timber time and time again. Exceptionally hard wearing, Summerville is designed to suit your lifestyle.



Kings Oak
SUM4911SP

Paronella Oak
SUM4912SP

Hyde Oak
SUM4914SP

Royal Oak
SUM4915SP

Fitzroy Oak
SUM4917SP

Park Oak
SUM4918SP

aussie species

From Tasmanian Oak to Spotted Gums, Summerville Aussie Species brings the beautiful outdoors in.



**Cradle
Tasmanian Oak**
SUM2060SP

**Idalia
Spotted Gum**
SUM1640SP

**Meroo
Spotted Gum**
SUM1641SP

**Bunya
Blackbutt**
SUM1643SP

Plank size:
223 x 1213mm
Thickness:
5.50mm
Wear Layer:
0.55mm Oaks
0.50mm Aussie Species



WHAT MAKES SUMMERVILLE SO SPECIAL?



EXTRA HEAVY DUTY
multi-layer quartz enhanced PUR coating has exceptional resistance to heavy foot traffic, indents & scuffs

DEEP STRUCTURED
decorative layer true-to-life look & feel of premium timber

RIGID SOLID-CORE
extra dense planks free from harmful content, water-proof, extra stable and extra sound absorbent, up to 80% natural limestone

BUILT IN UNDERLAY
for added acoustic performance and installation

SECURE INSTALLATION
the TIGHT-LOCK system ensures planks always remain flat & stable

YOUR LIFETIME GUARANTEE







FITZROY OAK

ACCESSORIES:


Scotia



Stair nosing

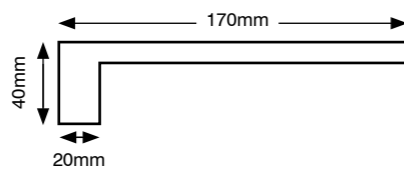

Junior ends




SUMMERVILLE CAN BE
LAID DIRECTLY OVER
MOST SURFACES
MAKING INSTALL
FAST & EASY

KEY FEATURES	HYBRID FLOORING	LOOSELAY LVT	TRADITIONAL LAMINATE
Will not warp or deform >80 degrees	✓	✗	✓
Water-proof (can be installed in bathrooms)	✓	✗	✗
Suitable in rooms with floor to ceiling windows	✓	✗	✗
Suitable for bathrooms & laundries	✓	✗	✗
Resistant to indentation	✓	✓	✓
Sound absorbent - BCA Acoustic Compliant	✓	✗	✗
Built in underlay	✓	✗	✗
Core is free of harmful content & plasticizers	✓	✗	✓
Suitable to be laid over tiles	✓	✗	✓
No acclimatisation necessary*	✓	✗	✗
No telegraphing ^Δ (show through)	✓	✗	✓
Installs in areas >400m ² without transition gaps	✓	✗	✗
Lays directly over chipboard*	✓	✗	✗
Fast & easy TIGHT LOCK install ('floating floor')	✓	✗	✓
Can be wet & steam mopped	✓	✗	✗
Steam mopped	✓	✗	✗

^Δ uneven floors require subfloor preparation when there is a height variation of more than 3mm over 1m * installed with permanent adhesive.
* refer to installation guidelines

SUMMERVILLE PERFORMS BRILLIANTLY UNDER EXTREME HEAT

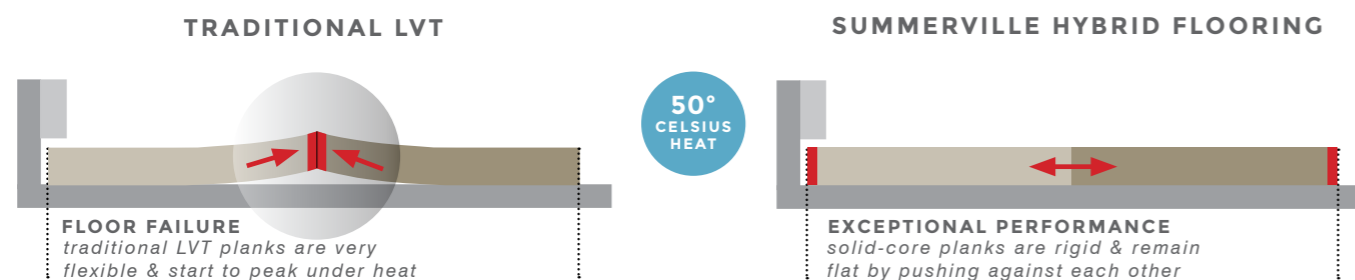

TECHNICAL SPECIFICATIONS

Plank Size	223 x 1213mm
Total Thickness	5.50mm (4mm board & 1.50mm backing)
Wear Layer	0.55mm Oaks 0.50mm Aussie Species
Wear Layer Treatment	Quartz enhanced PUR coating
Wear Class	Commercial class 34 - very heavy traffic
Surface	Natural embossed, true to life oak boards
Slip Resistance	P3 * relates to all stock received from October 2018
Edge Design	Micro V groove 4 sided
Fire Rating ISO 9239.1	Pass
Underfloor Heating	Suitable for water based systems
Planks per Box	9 pcs/box (2.434m ²)
Installation Method	Tight Lock - no underlay - min. floor prep* required
Warranty	Lifetime Residential, 15 Year Commercial



EASY TO INSTALL

Summerville uses the TIGHT LOCK Installation method. No glue is used. Planks CLICK together tightly on the long side and DROP into place on the short side, to give a water tight seal that doesn't warp or lift.

PERFORMANCE

Summerville solid-core planks feature a multi-layer quartz enhanced urethane coating which provides exceptional resistance to heavy foot traffic, indents, scratches and scuffs. They provide excellent acoustic benefits making them ideal where noise dampening is needed. In addition, Summerville floors are water and family proof as well as fade and heat resistant, making it an exceptional flooring product.

PROTECT YOUR INVESTMENT

Whilst this product is resistant to the harshest environments, it is not scratch proof. To ensure you get the best of your floor, place felt stoppers on the bottom of all furniture.

SUB-FLOORS

Summerville can be installed over most surfaces such as tiles with grout lines, particleboard and chipboard. Because planks are thick and rigid, there's no 'show through' (telegraphing). * Summerville solid-core planks do not require acclimatisation before laying, making installation, quick, clean and easy. * uneven floors require floor preparation. Please refer to our installation instructions.

SAFE & SUSTAINABLE

The solid-core of Summerville is free from ortho-phthalates, plasticizers and other harmful content. The TIGHT LOCK installation method is chemical, glue and dust free. Summerville are a certified product: (Reach - CE - PROP 65 - Floorscore - VIC A+ - DIBT)

PLASTICISER MIGRATION

Rubber mats and rubber furniture protectors will cause plasticizer migration onto your floor. To ensure this doesn't happen, you can not put any rubberised products onto your floor for an extended period of time.



•can be laid over tiled floors •sub-floor should be clean & dry •installs directly over irregularities •recommended use of builders plastic under flooring •can be laid over chipboard and tongue & groove flooring provided sub-floor is prepared in accordance with AS 1884 2012 •uneven floors require sub-floor preparation where there is a height variation more than 3mm over 1m •existing floors cannot be cushioned and need to be adhered to the sub-floor. Please refer to our installation instructions.



BUNYA BLACKBUTT

Summerville
Hybrid Flooring

Signature
signaturefloors®

au 03 9401 0888
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz

FRONT PAGE: CRADLE TASMANIAN OAK

Terms & Conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification.

This warranty is in addition to and does not affect your statutory rights. Our goods come with guarantees that cannot be excluded under the Australian Consumer/NZ Consumer Guarantees Act 1993. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Please refer to our warranties on: www.signaturefloors.com.au www.signaturefloors.co.nz 10/2019©